



No.11-3 Jianguo Rd., T.E.P.Z. 42760 Taiwan, ROC

All dimensions are millimeters.

CAD:	TCR
Review:	EG
Appr:	JL
Page:	1/4
Date:	April 24,2024

Specification Title:
Microprocessor Crystal Unit
Automotive Grade
2.5 x 2.0 millimeter Surface Mount - 4 Pad
General Product Specification

AEC-Q200 Qualified
IATF 16949 Certified

Series Name: C2E Auto Series

Electrical Specifications:





Frequency Range		12.000 to 133.000	MHz
Mode of Oscillation	Fundamental	12.000 to 66.999	MHz
	Third Overtone	67.000 to 133.000	MHz
Frequency Tolerance at 25°C	Standard	±30	PPM Max (Note 1)
		±50	
	Optional	±20	
		±15	
		±10	
Frequency Stability over Temperature Range	Standard	±50	PPM Max (Note 1)
		±100	
	Optional	±30	
		±25	
		±20	
Operating Temperature Range	Standard	-40 to +85	°C
	Optional	-40 to +105	
	Optional	-40 to +125	
Storage Temperature Range		-55 to +150	
Aging		±3	PPM Max/Year
Load Capacitance		6 to 47 and Series Resonance	pF
Shunt Capacitance		2.0	
Equivalent Series Resistance(ESR)		See ESR Table	Ohm
Drive Level		100	uW Max
Insulation Resistance		500 at 100 Vdc ± 15 Vdc	M Ohm

Frequency Range and ESR Values:

Frequency Range in MHz	ESR Ohm Max	Mode of Operation	Frequency Range in MHz	ESR Ohm Max	Mode of Operation
12.000 to 15.999	150	Fundamental	67.000 to 133.000	100	Third Overtone
16.000 to 19.999	80	Fundamental			
20.000 to 24.999	60	Fundamental			
25.000 to 29.999	50	Fundamental			
30.000 to 34.999	45	Fundamental			
35.000 to 66.999	40	Fundamental			

RoHS Compliant Pb - Lead Free AEC-Q200 Qualified IATF 16949 Certified	Ltr	Revisions	Date	Appr

Mechanical Outline:

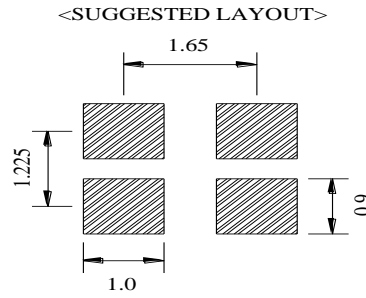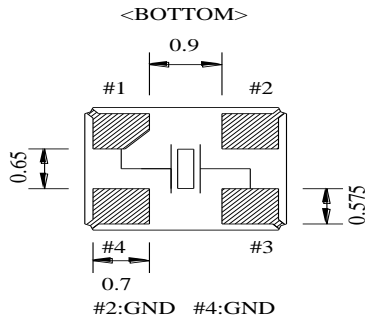

**Package is Seam Sealed Ceramic-Metal.
 Dimensions are millimeters.**

Page:	2/4	Date: April 24,2024	P/N:	C2E Auto Series	
-------	-----	---------------------	------	------------------------	--

How to build a Part Number:

Series		C	Parameter
Package		2E	2.5 x 2.0 mm - 4 Pad
		-	
Frequency		12.000 to 133.000	MHz
		-	
Load Capacitance		7	7pF
		10	10 pF
		12	12 pF
		16	16 pF
		18	18 pF
		20	20 pF
		32	32 pF
		S	Series
		-	
Frequency Tolerance (Note 1)	Standard	30	±30PPM
	Option	50	±50PPM
		20	±20PPM
		15	±15PPM
		10	±10PPM
Frequency Stability (Note 1)	Standard	50	±50PPM
	Option	100	±100PPM
		30	±30PPM
		25	±25PPM
		20	±20PPM
		-	
Mode of Oscillation		See Notes	Fundamental
		3	Third Overtone
		-	
AECQ-200		A	Automotive
		-	
Temperature Range	Standard	X	-40 to +85 °C
	Option	X1	-40 to +125 °C
	Option	X2	-40 to +105 °C
		-	
Packaging		M	250pcs Reel
		R	1000pcs Reel
		R3	3000pcs Reel

Part Number Example:

C2E-50.000-18-3050-A-X-R

C2E- 2.5 x 2.0 mm SMD Seam Seal Crystal Unit - 4 Pad

50.000 MHz Nominal Frequency

18 pF Load Capacitance

3050: ±30 PPM Frequency Tolerance and ±50 PPM Frequency Stability

Fundamental Mode

A: Automotive Grade

X: -40 to +85° C Temperature Range

R: Tape and Reel Packaging

Notes:

1- Frequency Tolerance and Stability options are limited due to physical size.

2- Product is shipped in Tape and Reel configuration

3- Quantities less than 250pcs are shipped in tape only.

4- Specification subject to change without notice.

Page: 4/4	Date: April 24,2024	P/N: C2E Auto Series	
-----------	---------------------	-----------------------------	--