



Accurate Kinetic Energy

No.11-3 Jianguo Rd., Tanzi Dist., 42760 Taiwan

All dimensions are millimeters.

CAD: TCR

Review: EG

Appr: JL

Page: 1/4 Date: February 5,2025

Specification Title:

**Clock Oscillator  
Automotive Grade  
3.2 x 2.5 millimeter Surface Mount  
General Product Specification**

**AEC-Q200 Qualified  
IATF 16949 Certified**

Part Number:

**S3 Auto Series**

**Electrical Specifications:**


Frequency Range		10.000~40.000	10.000~50.000	10.000~50.000	1.000~110.000	1.000~160.000	1.000~160.000	1.000~110.000	1.000~60.000	MHz
Frequency Stability		±25 ~ ±100								ppm
Aging per Year		±3								ppm Max.
Operating Temperature Range	Standard	-40 ~ +85								°C
	Option	-40 ~ +105								
	Option	-40 ~ +125								
Storage Temperature Range		-55 ~ +125								
Supply Voltage		0.9 ± 5%	1.2 ± 5%	1.5 ± 5%	1.8 ± 10%	2.5 ± 10%	3.3 ± 10%	1.62 ~ 3.63	5.0 ± 10%	VDD
Input Current	1.000 to 9.999MHz	-	-	-	3	5	5	5	10	mA Max.
	10.000 to 19.999MHz	1.5	2.5	3.5	5	5	5	5	12	
	20.000 to 31.999MHz	1.5	2.5	3.5	5	6	7	7	15	
	32.000 to 60.000MHz	2	3.5	4.5	10	12	12	12	22	
	60.001 to 110.000MHz	-	-	-	10	20	25	25	-	
Output Voltage	Logic High (Voh)	90%								VDD Min.
	Logic Low (Vol)	10%								VDD Max.
Output Symmetry (Duty Cycle)	Standard	40 ~ 60 ( at 50% VDD)								%
	Tight	45 ~ 55 ( at 50% VDD)								
Output Level		CMOS								
Output Load		15								pF Max.
Rise and Fall Time	1.000 to 9.999MHz	-	-	-	7	7	6	7	6	ns Max.
	10.000 to 19.999MHz	15	12	10	7	7	6	7	6	
	20.000 to 31.999MHz	15	12	10	6	6	5	6	5	
	32.000 to 60.000MHz	15	12	10	6	6	5	6	5	
	60.001 to 110.000MHz	-	-	-	6	6	5	6	-	
110.001 to 160.000MHz	-	-	-	-	6	6	-	-		
Phase Jitter RMS (12 KHz to 20 MHz)		1								ps Max.
Enable-Disable Function		Tri-State								
Start Up Time		5								ms Max.

Temperature stability is Inclusive of all conditions:

Calibration Tolerance at +25°C, frequency stability over the operating temperature range, supply voltage change, output load change, shock, vibration, and 1st year aging at +25°C.

<b>RoHS Compliant</b> <b>Pb - Lead Free</b> <b>AEC-Q200 Qualified</b> <b>IATF 16949 Certified</b>	Ltr	Revisions	Date	Appr

## Mechanical Outline and Solder Pad Layout:

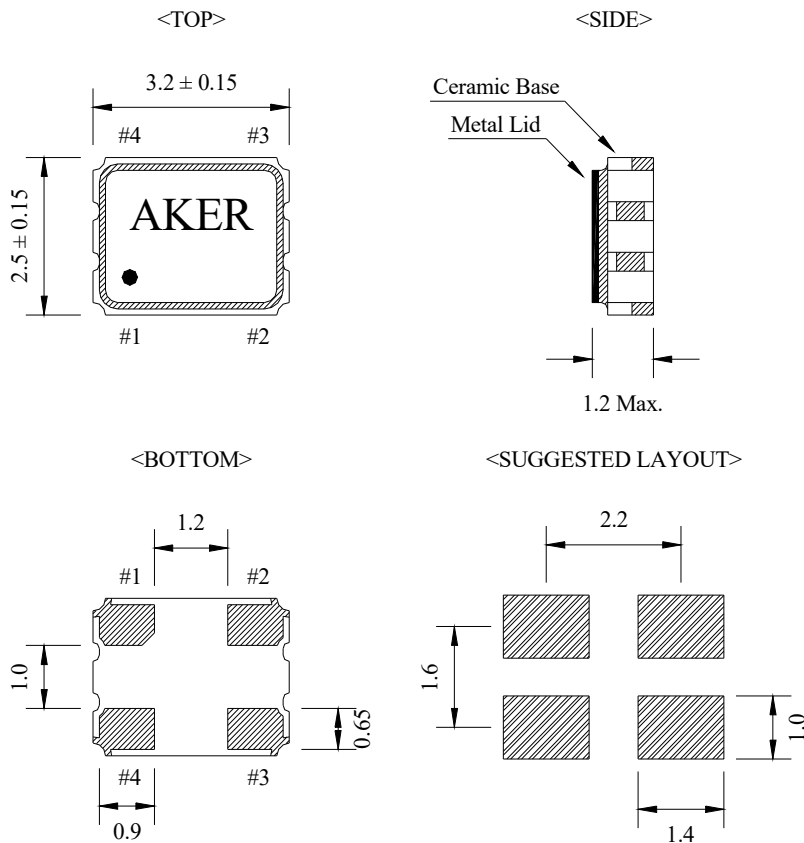

Pin Connection	
PIN No.	Connection
#1	Enable/Disable
#2	GND
#3	Output
#4	VDD


Enable/Disable Function	
PIN #1	PIN #3
HIGH or OPEN	Operating
LOW	High Impedance

**Package is Seam Sealed Ceramic-Metal.**

**Terminator Pads are Ni/Au.**


**Dimensions are millimeters.**

**Carrier Tape Dimensions:**

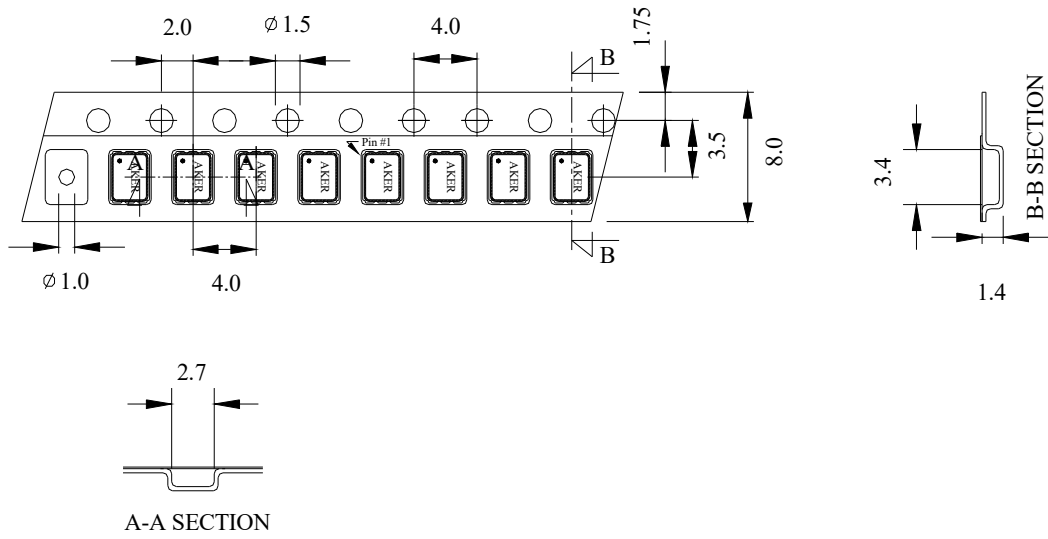

**Dimensions are millimeters.**

**Solder Reflow Characteristics:**

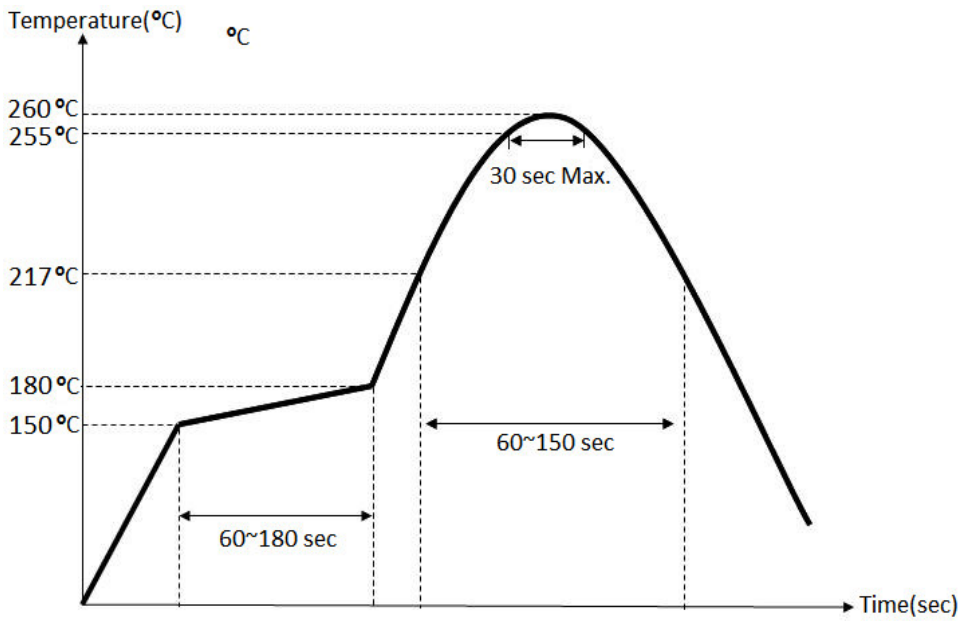

**How to build a Part Number:**

Series	S	Parameter
Package	3	3.2 x 2.5 mm
Supply Voltage	50	+5.0 VDD ± 10%
	33	+3.3 VDD ± 10%
	25	+2.5 VDD ± 10%
	18	+1.8 VDD ± 10%
	15	+1.5 VDD ± 5%
	12	+1.2 VDD ± 5%
	09	+0.9 VDD ± 5%
	M	+1.62 ~ +3.63 VDD
Temperature Stability	10	±100 ppm
	05	±50 ppm
	03	±30 ppm
	025	±25 ppm
Duty Cycle	See Notes	40%~60%
	T	45%~55%
	-	
Frequency	1.000~160.000	MHz
	-	
AECQ-200	A	Automotive
	-	
Temperature Range	X	-40 ~ +85 °C
	X1	-40 ~ +125 °C
	X2	-40 ~ +105 °C
	-	
Packaging	M	250pcs Reel
	R	1000pcs Reel
	R3	3000pcs Reel

**Part Number Example:**

S33305T-50.000-A-X-R

S3: 3.2 x 2.5 mm SMD Package

33: +3.3±10% VDD Supply Voltage

05: ±50 ppm Temperature Stability

T: 45%~55% Tight Symmetry

50.000 MHz Nominal Frequency

A: Automotive Grade

X: -40 ~ + 85°C Temperature Range

R: Tape and Reel Packaging - 1000pcs Reel

**Notes:**

- 1- Standard Duty Cycle and Temperature Range do not need to be included in Part Number description.
- 2- Product is shipped in Tape and Reel configuration.
- 3- Quantities less than 250pcs are shipped in tape only.
- 4- Specification subject to change without notice.