

Han TC300 male contact 120mm²

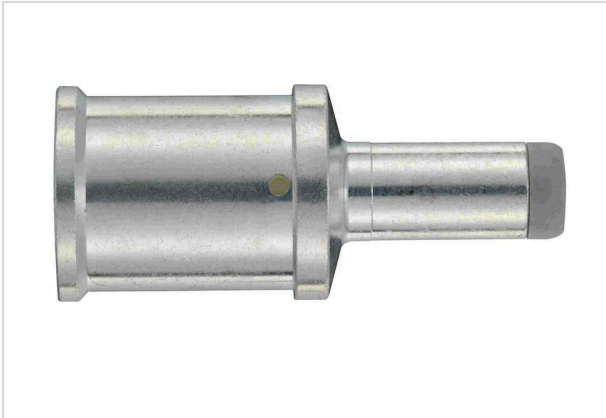


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 11 000 7537 |
| Specification | Han TC300 male contact 120mm ² |
| HARTING eCatalogue | https://harting.com/09110007537 |

Identification

| | |
|-----------------|---------------|
| Category | Contacts |
| Type of contact | Crimp contact |

Version

| | |
|-----------------------|-------------------|
| Termination method | Crimp termination |
| Gender | Male |
| Manufacturing process | Turned contacts |

Technical characteristics

| | |
|-------------------------|---------------------|
| Conductor cross-section | 120 mm ² |
| Rated current | ≤300 A |
| Contact resistance | ≤0.3 mΩ |
| Stripping length | 24 mm |
| Limiting temperature | -40 ... +125 °C |
| Mating cycles | ≥500 |

Material properties

| | |
|---------------------|---------------|
| Material (contacts) | Copper alloy |
| Surface (contacts) | Silver plated |

Specifications and approvals

| | |
|----------------|--------------------------|
| Specifications | IEC 60664-1 IEC 61984 |
|----------------|--------------------------|



Pushing Performance
Since 1945

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 2 |
| Net weight | 40 g |
| Country of origin | Romania |
| European customs tariff number | 85366990 |
| GTIN | 5713140188402 |
| ETIM | EC000796 |
| eCl@ss | 27440204 Contact for industrial connectors |