

Features

- ◆ Plug-in module
- ◆ Easy to connect and replace in all MiBRX base modules
- ◆ Configured via Selpro software
- ◆ Spring fit terminals

Technical Specification

Output specifications

Fast Output

No. of outputs	1
Output type	NPN
Output voltage	18 to 30VDC
Response time	10 ms (Selectable through software via debounce parameters)
Output frequency	10Hz
Isolation between outputs	4kV


Transistor output

No. of outputs	1
Output type	PNP
Output voltage	18 to 30VDC
Response time	10 ms (Selectable through software via debounce parameters)
Output current	100mA max per output
Isolation between outputs	4kV

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

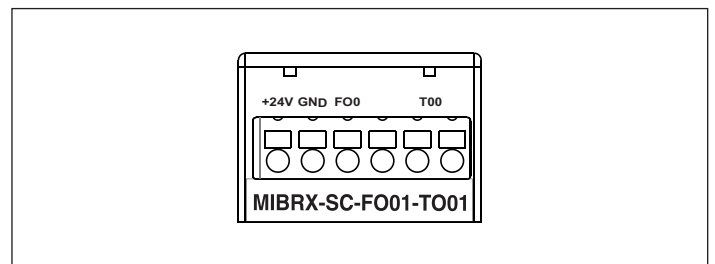

Ordering information

Product code	Description	Certification
MIBRX-SC-FO01-TO01	MiBRX Slot Card - 1 Fast Output (Upto 10KHz) & 1 Transistor Output	CE