




0078735A7S01

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

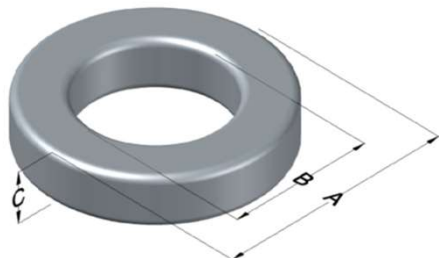


Xflux Si Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
26	88 $\pm$ 8%	XXXXXX	78735A7	N/A	Brown

Dimensions	Uncoated		Coated Limits			Packaging
	(mm)	(in)	(mm)	(in)		
OD (A)	74.09	2.917	75.21	2.961	max	Cardboard cut-outs Box Qty= 24 pcs
ID (B)	45.29	1.783	44.40	1.748	min	
HT (C)	35.00	1.378	35.92	1.414	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 50kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _a (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (g)
1000	80%	50%	3000	227.0	1,550	498	183.8	91,600	634
	230	420							

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 700°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	84.4	Coating Temp (Continuous up to): 200°C
					HT	49.7	
				Completely Full Window	Max OD	89.0	Notes:
					Max HT	68.1	
0%	103	40%	125	Surface Area (mm ²)			
20%	114	45%	129				
25%	117	50%	132				
30%	119	60%	139	Unwound Core		19,000	
35%	123	70%	147	40% Winding Factor		28,000	

Typical DC Bias Performance

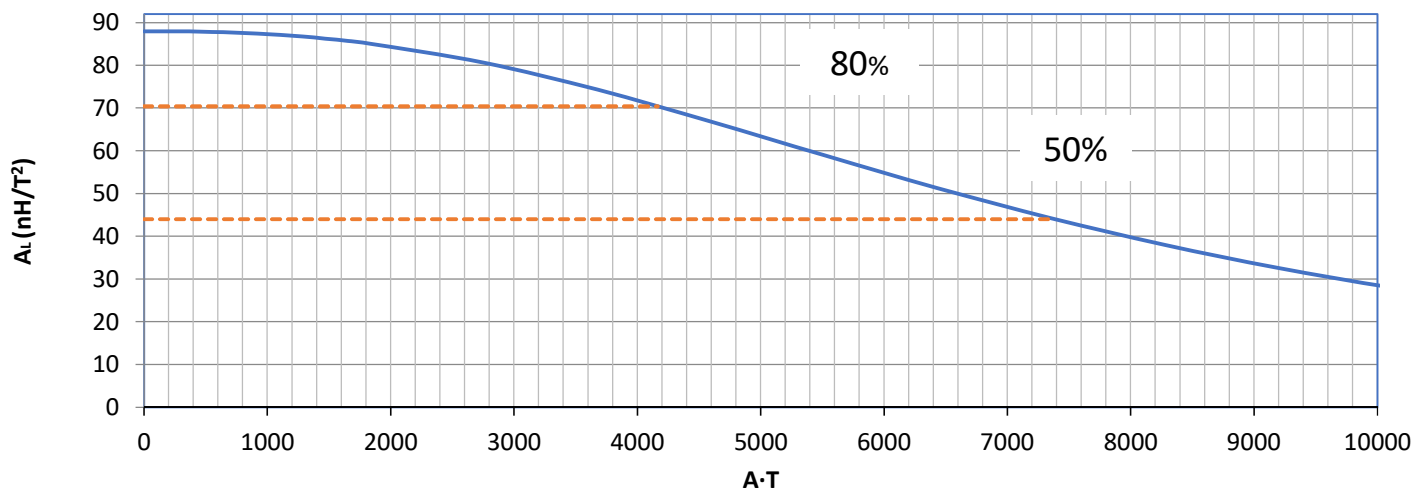

Revision 10/6/2021