

1415898-5 ✓ ACTIVE

SCHRACK | SCHRACK Power PCB Relay RT Inrush Power


TE Internal #: 1415898-5

General Purpose Power Relay, DC, Bistable, 2 Coils, Polarized, Latching, 1 Form A SPST-NO, SCHRACK Power PCB Relay RT Inrush Power

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays > PCB Power Relay: 16 Amp, Inrush

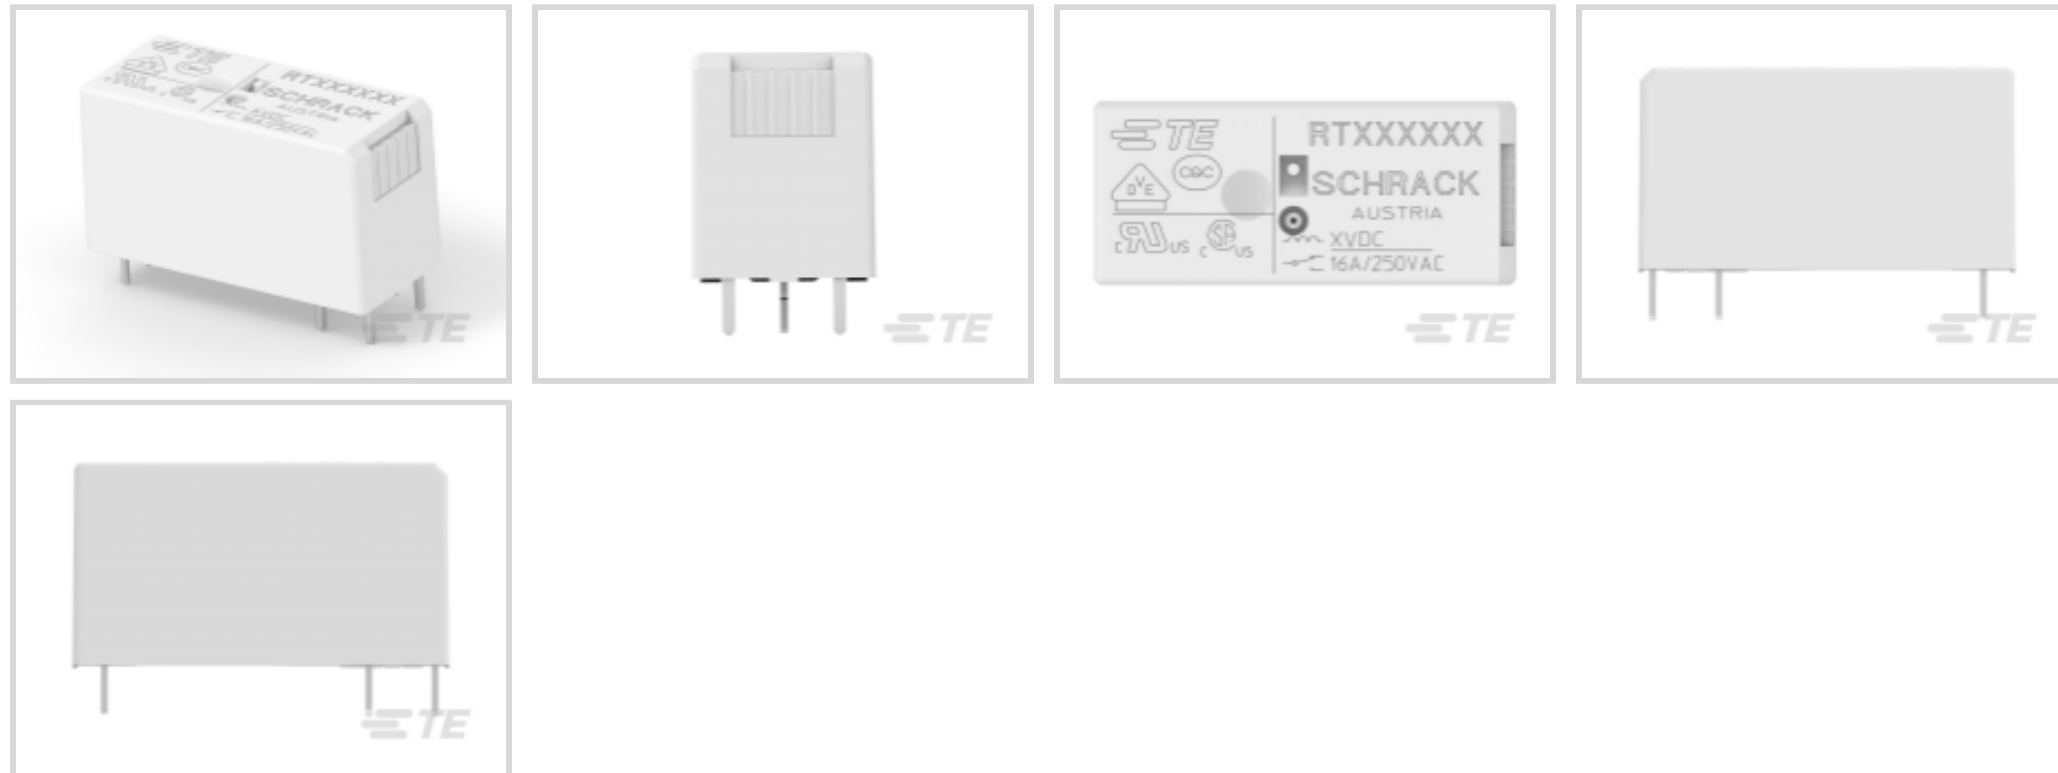

Relay & Contactor Type: **General Purpose Power Relay**

Current Type: **DC**

Coil Magnetic System: **Bistable, 2 Coils, Polarized, Latching**

Contact Arrangement: **1 Form A SPST-NO**

Contact Current Rating: **16 A**

[All PCB Power Relay: 16 Amp, Inrush \(17\)](#)

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Configuration Features

Contact Special Features	W Pre-Make Contact
Contact Number of Poles	1
Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	1 Form A SPST-NO

Electrical Characteristics

Contact Limiting Making Current	165 A
Contact Limiting Continuous Current	16 A
Contact Limiting Breaking Current	16 A
Insulation Initial Dielectric Between Open Contacts	1250 Vrms
Contact Switching Voltage (Max)	400 VAC



Coil Resistance	240 Ω
Contact Current Rating	16 A
Coil Voltage Rating	12 VDC
Contact Voltage Rating	250 VAC
Coil Power Rating DC	.6 W
Insulation Initial Dielectric Between Contacts & Coil	5000 Vrms

Body Features

Product Weight	14 g[.494 oz]
Enclosure Type	Flux Resistant Automatic Solder Capable

Contact Features

Contact Material	W + AgSnO ₂
------------------	------------------------

Termination Features

Main Termination & Connection Type	Solder Pins
Coil Termination & Connection Type	Solder Pins

Mechanical Attachment

Product Mount Type	Board Mount
--------------------	-------------

Dimensions

Insulation Clearance Between Contact & Coil	10 mm[.394 in]
Insulation Creepage Between Contact & Coil	10 mm[.394 in]
Product Width	12.7 mm[.5 in]
Product Length	29 mm[1.14 in]
Product Height	15.7 mm[.618 in]

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Environmental Category of Protection	RTII
Environmental Ambient Temperature (Max)	105 °C[221 °F]

Operation/Application

Solder Process	Wave Solder Capable
Current Type	DC
Coil Magnetic System	Bistable, 2 Coils, Polarized, Latching

Packaging Features

Packaging Method	Carton, Tube
------------------	--------------



Other

Coil Power Rating Class	.5 – .6 W
Contact Current Class	16 A
Environmental Ambient Temperature Class	70 – 85 °C
Height Class (Mechanical)	15 – 16 mm
Length Class (Mechanical)	25 – 30 mm
Width Class (Mechanical)	12 – 16 mm

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 9-1415898-1
RTSETF12

Also in the Series | SCHRACK Power PCB Relay RT Inrush Power



General Purpose Power Relays(33)



PCB Relays(33)

Customers Also Bought



TE Part #2000713-6
RA Keyed Guide Mod, Vita 46,
Machined



TE Part #1-188275-0
MICRO-MATCH SMD FTE



TE Part #2176330-9
CRGP 2010 47R 1%



TE Part #215464-4
04P.MICRO-MATCH MOB



TE Part #1-1879215-7
CPF 0402 5K9 0.1% 25PPM 1K RL



TE Part #2302785-1
RA PLUG ASSY,7ROW,CENTER,VPX,
MG RT3



TE Part #2359309-1
CAGE ASSEMBLY, QSFP28 1X1
THERMAL BRIDGE



TE Part #60940-1
.058 PIN REC 24-20 010PTPPHBZ



TE Part #5796055-1
68 CHAMP R/A ASSY,LC



TE Part #826632-3
3P AMPMODU II PIN HDR.



Documents

CAD Files

Customer View Model

[ENG_CVM_CVM_1415898-5_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1415898-5_E.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1415898-5_E.2d_dxf.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Power PCB Relay RT Inrush Power](#)

English

Product Specifications

[Definitions General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English