




AMP | AMP Type III+

TE Internal #: 163085-8

Pin Contact, Precious Metal, Size 16 Contact Size, 24 – 20 AWG, .2 – .5 mm² Wire, Crimp, Brass, Power & Signal, AMP Type III+

[View on TE.com >](#)

Connectors > Contacts > Connector Contacts

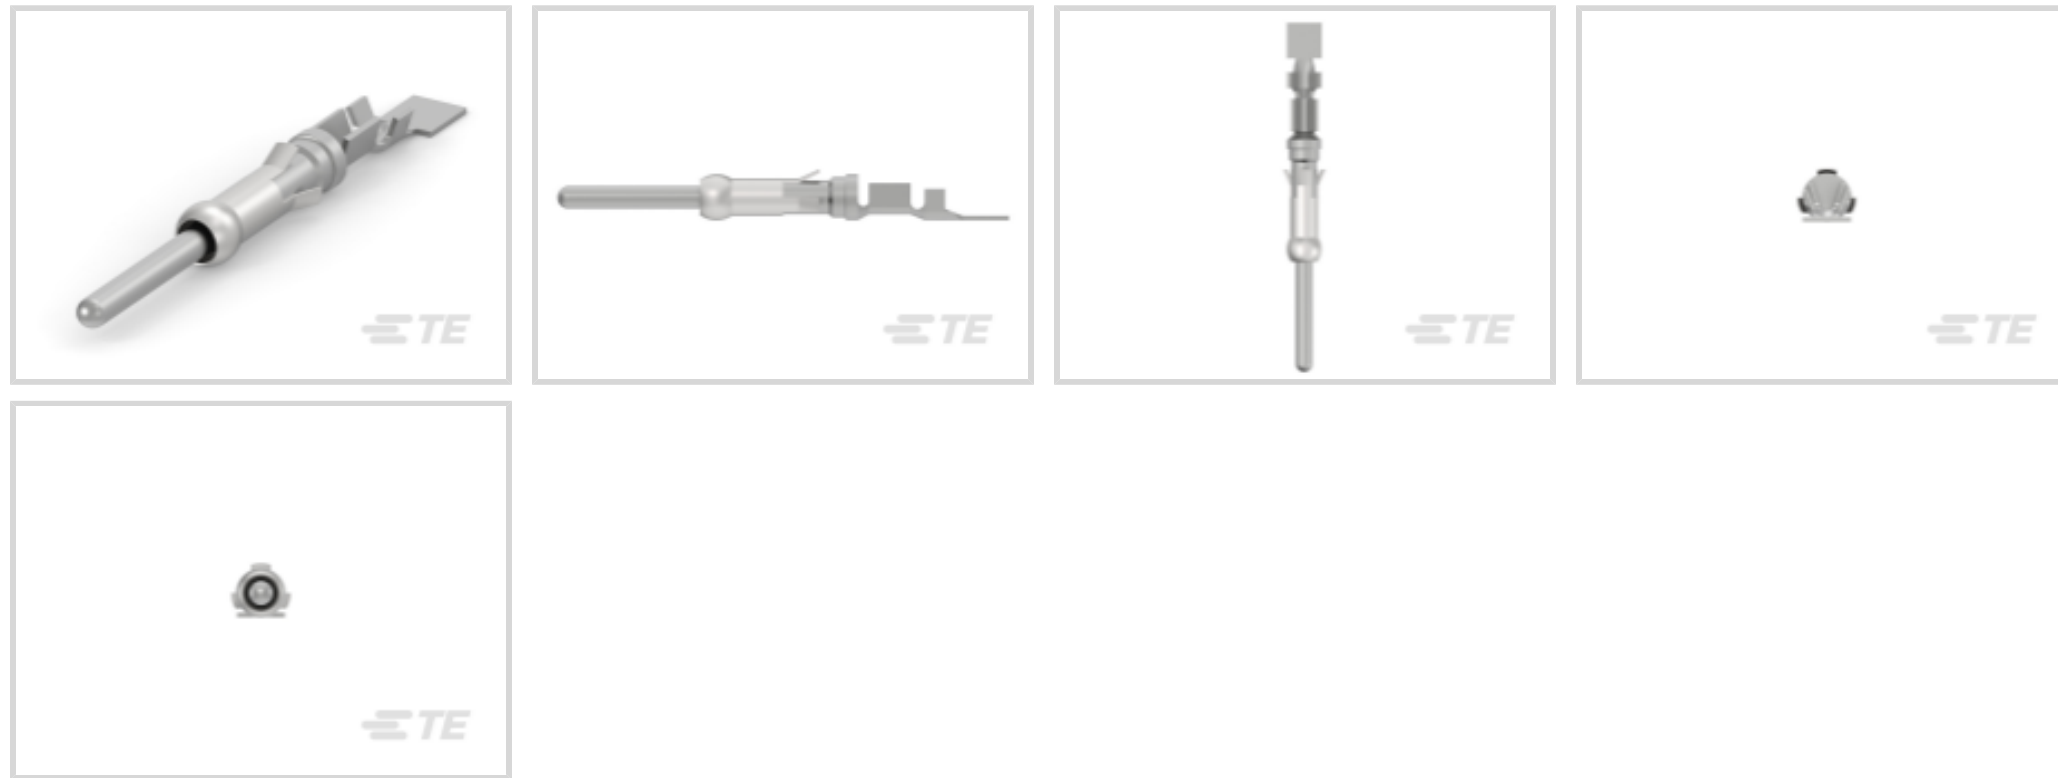

Contact Type: **Pin**

Contact Mating Area Plating Material: **Precious Metal**

Wire Contact Termination Area Plating Material: **Gold Flash**

Contact Retention Within Housing: **With**

Contact Size: **Size 16**

Features

Product Type Features

| | |
|--------------------|----------|
| Discrete Wire Type | Stranded |
|--------------------|----------|

Contact Features

| | |
|---|------------------|
| Contact Underplating Material | Nickel |
| Contact Orientation | Straight |
| Mating Pin Diameter | 1.57 mm[.062 in] |
| Contact Underplating Material Thickness | 1.27 μm[50 μin] |
| Contact Mating Area Plating Material Thickness | .76 μm[30 μin] |
| Wire Contact Termination Area Plating Material Finish | Bright |
| Wire Contact Termination Area Plating Thickness | .076 μm[3 μin] |
| Contact Mating Area Plating Material Finish | Bright |
| Contact Type | Pin |
| Contact Mating Area Plating Material | Precious Metal |
| Wire Contact Termination Area Plating Material | Gold Flash |
| Contact Retention Within Housing | With |
| Contact Size | Size 16 |



| | |
|------------------------------|-------|
| Contact Base Material | Brass |
| Contact Current Rating (Max) | 13 A |

Termination Features

| | |
|------------------------------------|--------------|
| Termination Method to Wire & Cable | Crimp |
| Product Terminates To | Wire & Cable |

Mechanical Attachment

| | |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

| | |
|--------------------------------------|-------------------------------|
| Compatible Insulation Diameter Range | 1.1 – 1.8 mm [.045 – .071 in] |
| Wire Size | .2 – .5 mm ² |

Usage Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | -55 – 150 °C [-67 – 302 °F] |
|-----------------------------|-----------------------------|

Operation/Application

| | |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Packaging Features

| | |
|--------------------|------|
| Packaging Quantity | 5000 |
| Packaging Method | Reel |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



Also in the Series | AMP Type III+



Connector Contacts(365)

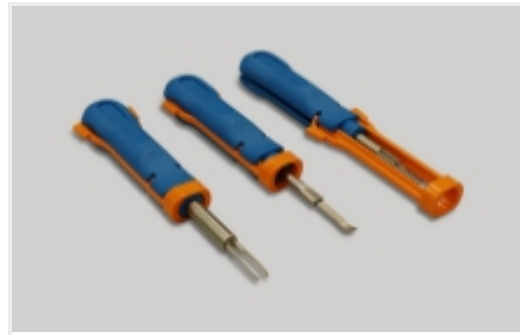


Insertion & Extraction Tools(4)



Power Contacts(365)

Customers Also Bought

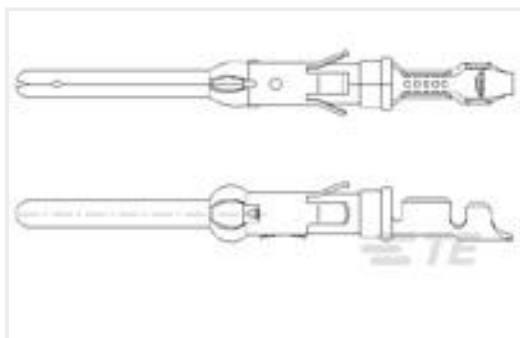

TE Part #163081-7
.062 DIA PIN ASSY 3+



TE Part #60-0003-011-P00
CONTACT SOCKET 2 MM



TE Part #164161-3
M-SRS.PIN BODY 3+




TE Part #61769-2
SPLICE 1200-2600 .020 NPST



TE Part #3-917809-3
DYNAMIC D-5 TAB HSG D/R 6P X-Y




TE Part #60-0001-011-P00
CONTACT SOCKET 1 MM



TE Part #40-0990-000-P00
623 INSULATION INSERT, 17-PIN



TE Part #61-0040-011-P00
CONTACT PIN 3,6 MM



TE Part #10-0999-054-P00
623 plug housing IG3



TE Part #2-1103101-3
HN.D.7.BU.C. 250 V

Documents

Product Drawings

[.062 DIA PIN ASS 3+](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_163085-8_AE.2d_dxf.zip](#)



English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_163085-8_AE.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_163085-8_AE.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Product Specification](#)

English