

7012AH ✓ ACTIVE

Agastat

TE Internal #: 2-1423157-0

Time Delay Relay, AC, 2 Form C DPDT-CO, 10 A Contact Rating,  
Chassis Mount, 75 °C [167 °F]

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **Time Delay Relay**

Current Type: **AC**

Contact Arrangement: **2 Form C DPDT-CO**

Contact Current Rating: **10 A**

Main Termination & Connection Type: **Screw Terminals**

## Features

### Product Type Features

Relay & Contactor Type	Time Delay Relay
------------------------	------------------

### Configuration Features

Contact Arrangement	2 Form C DPDT-CO
---------------------	------------------

### Electrical Characteristics

Contact Current Rating	10 A
------------------------	------

### Termination Features

Main Termination & Connection Type	Screw Terminals
------------------------------------	-----------------

Coil Termination & Connection Type	Screw Terminals
------------------------------------	-----------------

### Mechanical Attachment

Product Mounting Feature Type	Mounting Brackets
-------------------------------	-------------------

Product Mount Type	Chassis Mount
--------------------	---------------

### Dimensions

Product Width	82.55 mm[3.25 in]
---------------	-------------------

Product Length	114.8 mm[4.52 in]
----------------	-------------------

Product Height	78.4 mm[3.09 in]
----------------	------------------

### Usage Conditions

Operating Temperature Range	-30 – 75 °C
-----------------------------	-------------



Environmental Ambient Temperature (Max) 75 °C[167 °F]

### Operation/Application

Type of Control	Knob
Delay Time	3 – 30 minutes
Mode of Operation	On-Delay
Repeatability (Max)	±10%
Current Type	AC

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Cd (15% in Component Part) Pb (3.7% in 74019790) <b>Article Safe Usage Statements:</b> Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 2-1423159-3  
7012PC=RLY,STD,ON,2P,125VDC,15

## Customers Also Bought

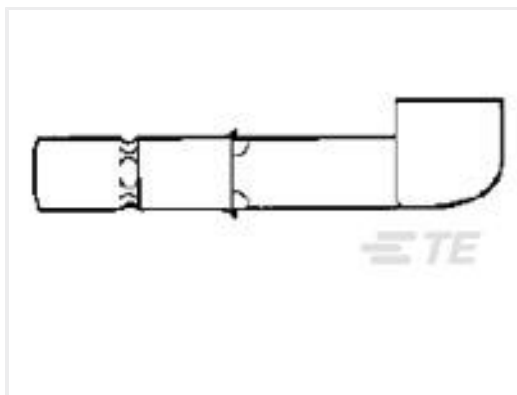

TE Part #31943  
KNIFE DISCONNECT,DG 16-14



TE Part #0460-202-16141  
PIN, SOLID, SIZE 16, 16-20AWG, NI



TE Part #1-1423162-8  
7022AK=RLY,STD,OFF,2P,120VAC,1



TE Part #1423162-2  
7022AB=RLY,STD,OFF,2P,120VAC,5



TE Part #4-2027183-3  
KUPE-11D15-125=RELAY,3A,2C,  
AGCDO,QC.187,

## Documents

### Product Drawings

7012AH=RLY,STD,ON,2P,120VAC,30

English

### CAD Files

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2-1423157-0\\_L.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2-1423157-0\\_L.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2-1423157-0\\_L.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

7012AH

Time Delay Relay, AC, 2 Form C DPDT-CO, 10 A Contact Rating, Chassis Mount, 75 °C [167 °F]



[Datasheets & Catalog Pages](#)

[5-1773450-5\\_sec12\\_7000](#)

English