



TE Internal #: 2013289-1  
 Double Data Rate (DDR) 3, 5.2 mm [.205 in] Stack Height, Right Angle Module Orientation, 204 Position, .6 mm [.024 in] Centerline, SO DIMM Sockets

[View on TE.com >](#)

Connectors > Socket Connectors > Memory Sockets > SO DIMM Sockets



DRAM Type: **Double Data Rate (DDR) 3**  
 Stack Height: **5.2 mm [.205 in]**  
 Module Orientation: **Right Angle**  
 Number of Positions: **204**  
 Centerline (Pitch): **.6 mm [.024 in]**

### Features

#### Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector System	Cable-to-Board
DRAM Type	Double Data Rate (DDR) 3

#### Configuration Features

Number of Bays	2
Number of Keys	1
Number of Rows	2
Module Orientation	Right Angle
Number of Positions	204

#### Electrical Characteristics

DRAM Voltage	1.5 V
--------------	-------

#### Signal Characteristics

SGRAM Voltage	1.5 V
---------------	-------

#### Body Features



Latch Plating Material	Tin
Latch Material	Stainless Steel
Module Key Type	SGRAM
Ejector Type	Locking
Ejector Location	Both Ends
Connector Profile	Standard

#### Contact Features

Contact Current Rating (Max)	.5 A
Memory Socket Type	Memory Card
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Gold
Contact Mating Area Plating Material	Gold Flash

#### Termination Features

Insertion Style	Cam-In
Termination Method to PCB	Surface Mount

#### Mechanical Attachment

Connector Mounting Type	Board Mount
PCB Mount Retention Type	Solder Peg
Mating Alignment Type	Standard Keying
PCB Mount Retention	With

#### Housing Features

Housing Material	High Temperature Thermoplastic
Housing Color	Black
Centerline (Pitch)	.6 mm [.024 in]

#### Dimensions

Stack Height	5.2 mm [.205 in]
Row-to-Row Spacing	8.2 mm [.322 in]

#### Usage Conditions

Operating Temperature Range	-55 – 85 °C [-67 – 185 °F]
-----------------------------	----------------------------

#### Operation/Application

Circuit Application	Power
---------------------	-------

#### Industry Standards



UL Flammability Rating	UL 94V-0
------------------------	----------

**Packaging Features**

Packaging Quantity	20
Packaging Method	Semi-Hard Tray Assembly

**Product Compliance**

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C


**Product Compliance Disclaimer**

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

**Compatible Parts**



## Customers Also Bought

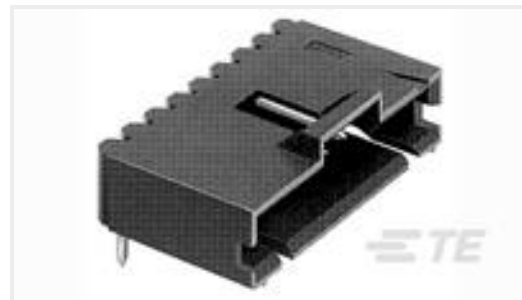

TE Part #6-103634-1  
12 MTE HDR SRRA LTCH.100CL LF



TE Part #7-1879494-9  
CRGH0603 5% 1K8 0.2W



TE Part #120953-2  
TE UPM Ver Receptacle 5P HC Power



TE Part #2-2176329-5  
CRGP 1210 1K0 1%



TE Part #1879217-1  
CPF 0603 130K 0.1% 25PPM 1K RL



TE Part #1622441-1  
LR1 1% 33K2



TE Part #1-1825097-6  
TPB11FGVRA004



TE Part #3-2176412-5  
5W XSM M/OX 5% 130R



TE Part #2176349-5  
CRGCO 2512 22R 1%



TE Part #5-103673-2  
3 MTE HDR SRRA LATCH W/HLDWN

## Documents

### Product Drawings

[SEMI-HARD TRAY DDR3 204P 5.2H STD](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_2013289-1\\_B.2d\\_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2013289-1\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2013289-1\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



## Datasheets & Catalog Pages

[DDR3 DIMM Sockets Flyer 6-1773454-7 05/09](#)

English

[6-1773457-3\\_DDR3\\_DIMM\\_SOCKETS](#)

---

## Product Specifications

[Product Specification](#)

English