



Kemtron | Kemtron 1210 Series

TE Internal #: 2418226-1

Moulded EMI Gasket, Rectangular, 1.2 mm [.047 in] Thick, 150 mm [5.9 in] Width, .012 Ω.cm Volume Resistivity, Kemtron 1210 Series

[View on TE.com >](#)

EMI & EMC Solutions > EMI Shielding > EMI Gaskets > Moulded EMI Gasket Conductive Sheet



Gasket Type: **Moulded EMI Gasket**

Gasket Shape: **Rectangular**

Product Thickness: **1.2 mm [.047 in]**

Product Width: **150 mm [5.9 in]**

Operating Temperature Range: **-55 – 160 °C [-67 – 320 °F]**

[All Moulded EMI Gasket Conductive Sheet \(36\)](#)

Features

Product Type Features

Closing Force	171.5 N/cm ²
---------------	-------------------------

Electrical Characteristics

Resistance to Petroleum	Yes
Volume Resistivity (Max)	.012 Ω.cm

Body Features

Gasket Type	Moulded EMI Gasket
Gasket Shape	Rectangular

Dimensions

Product Thickness	1.2 mm[.047 in]
Product Width	150 mm[5.9 in]

Usage Conditions

Operating Temperature Range	-55 – 160 °C[-67 – 320 °F]
-----------------------------	----------------------------



Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JAN 2025 (247)</p> <p>Candidate List Declared Against: JUNE 2024 (241)</p> <p>SVHC > Threshold:</p> <p>DCP (.32% in Component)</p> <p>Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



Also in the Series | [Kemtron 1210 Series](#)




EMI Gaskets(36)

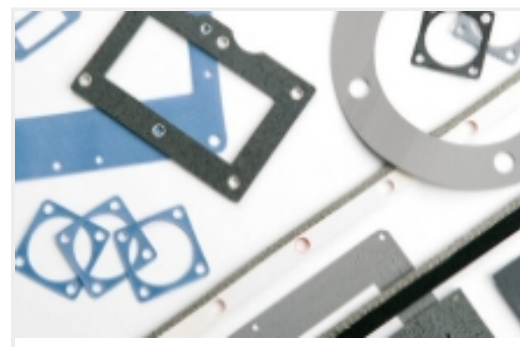

Medical EMI & EMC Solutions(36)

Customers Also Bought

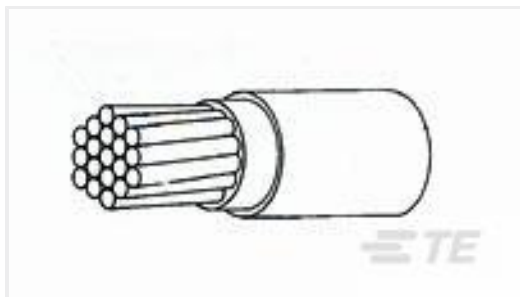

TE Part #2820303009
44A0111-22-0




TE Part #YDTS20W09-35PNC001
RECP ASSY



TE Part #2418225-1
FSA Sheet 150mm sq x 0.8mm



TE Part #3-1437559-7
MTL206N=(MSTL) SW TOG LOCKING

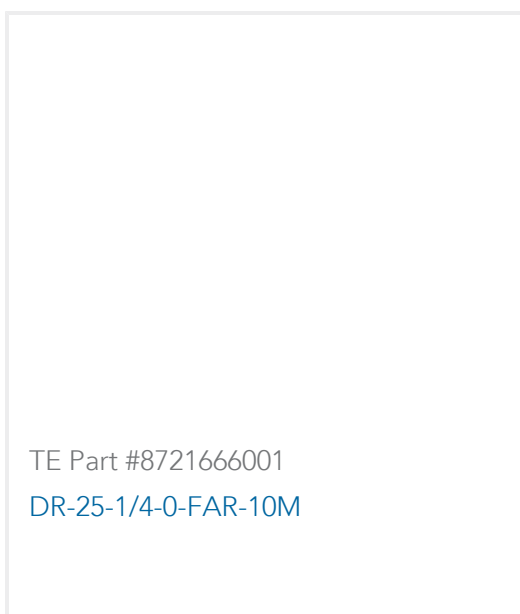

TE Part #8721666001
DR-25-1/4-0-FAR-10M

Documents

Product Drawings

[FSA Sheet 150mm sq x 1.2mm](#)

English

Datasheets & Catalog Pages

[Performance Materials brochure](#)

English

[Datasheet - Conductive Elastomers](#)

English

Product Specifications

[Application Specification](#)

English