

350827-4 ✓ ACTIVE

MATE-N-LOK | Universal MATE-N-LOK


TE Internal #: 350827-4

PCB Mount Header, Vertical, Wire-to-Board, 6 Position, 6.35 mm [.25 in] Centerline, Fully Shrouded, Gold (Au), Universal MATE-N-LOK

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

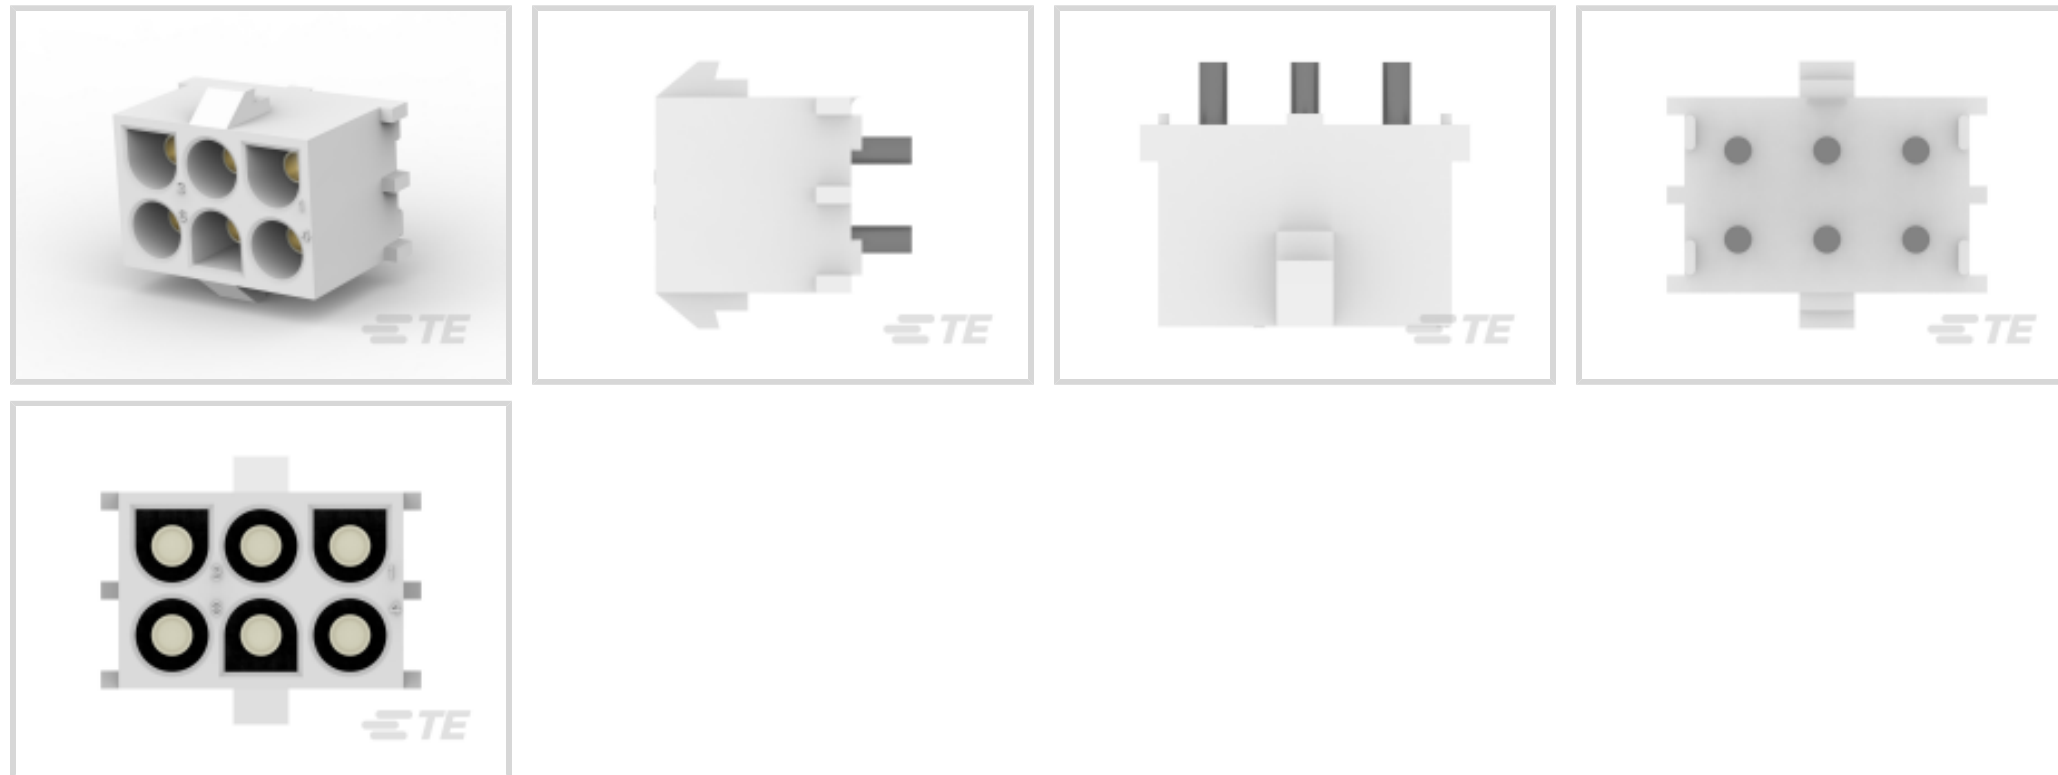

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **6**

Number of Rows: **2**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	3
Number of Loaded Positions	6
Number of Power Positions	6
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	6



Number of Rows	2
----------------	---

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Underplating Material	Nickel
-------------------------------	--------

Contact Underplating Material Thickness	1.27 – 1.79 μm [50 – 70 μin]
---	---

PCB Contact Termination Area Plating Material Finish	Matte
--	-------

Contact Size	2.95mm
--------------	--------

Contact Mating Area Plating Material Thickness	.76 – .91 μm [30 – 36 μin]
--	---

PCB Contact Termination Area Plating Material Thickness	3.81 – 5.08 μm [150 – 200 μin]
---	---

Contact Shape & Form	Round
----------------------	-------

Contact Layout	Matrix
----------------	--------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

PCB Contact Termination Area Plating Material	Tin
---	-----

Contact Mating Area Plating Material	Gold (Au)
--------------------------------------	-----------

Contact Type	Socket
--------------	--------

Contact Current Rating (Max)	12 A
------------------------------	------

Termination Features

Termination Post & Tail Diameter	1.57 mm[.062 in]
----------------------------------	------------------

Termination Post & Tail Length	3.56 mm[.14 in]
--------------------------------	-----------------

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Panel Mount Feature	Without
---------------------	---------

Mating Retention Type	Locking Tab
-----------------------	-------------

Mating Retention	With
------------------	------

Mating Alignment Type	Polarization
-----------------------	--------------

PCB Mount Retention	Without
---------------------	---------

PCB Mount Alignment	Without
---------------------	---------

Connector Mounting Type	Board Mount
-------------------------	-------------

Mating Alignment	With
------------------	------



Housing Features

Mating Entry Location	Top
Housing Material	Nylon
Centerline (Pitch)	6.35 mm [.25 in]

Dimensions

Row-to-Row Spacing	6.35 mm [.25 in]
Connector Width	13.97 mm [.55 in]
PCB Thickness (Recommended)	1.57 mm [.062 in]
Connector Height	13.97 mm [.55 in]
Connector Length	20.32 mm [.8 in]
Profile Height from PCB	14.73 mm [.58 in]

Usage Conditions

Operating Temperature (Max)	105 °C [221 °F]
Operating Temperature Range	-40 – 105 °C [-40 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL, VDE
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	100
Packaging Method	Bag

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247)



Candidate List Declared Against: JAN 2025 (247)

Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2029369-1
06P UMNL-II REAR, TW-N-LK-CAP



TE Part # 2029367-1
06P UMNL-II TW-N-LK-CAP FRONT



TE Part # 1-350590-0
STR/REL CLAMP NATL



TE Part # 926682-1
UNIVERSAL M-N-L CAP 6 POS



TE Part # 926682-4
6P UN-MNL AUFN-GEH



TE Part # 643253-1
06P UMNL ASSY MOD HSG VO



TE Part # 8-794536-1
06P UMNL CAP HSG 150C BLK, SPE



TE Part # 770020-1
06P UMNLI IN-LNE PLUG HSG KIT




TE Part # 1969881-1
06P UMNL CAP HSG, P/M, GW V0



TE Part # 1586860-1
06P UMNL CAP HSG, GW



TE Part # 350848-6
06P UMNL PLUG TEST ASSY 94V0



TE Part # 350715-1
06P UMNL PLUG HSG



TE Part # 350812-1
STR/REL CLAMP UMNL



TE Part # 1586887-1
06P UMNL CAP HSG, P/M, GW



TE Part # 1-640721-0
06P UMNL STR/REL & INSRT NATL



TE Part # 640715-1
06P UMNL STR/REL



TE Part # 926682-3
06P UNIV.M-N-L.HSG.




TE Part # 794536-1
06P UMNL CAP HSG 150C BLK




TE Part # 794714-3
06P UMNL CAP HSG RED,PAN MNT


Also in the Series | **Universal MATE-N-LOK**




Circular Power Connectors(2)

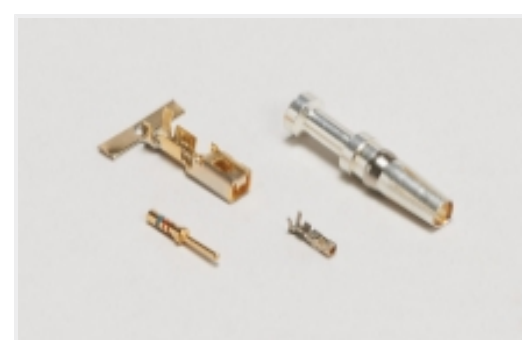

Connector Contacts(208)




Connector Hardware(12)

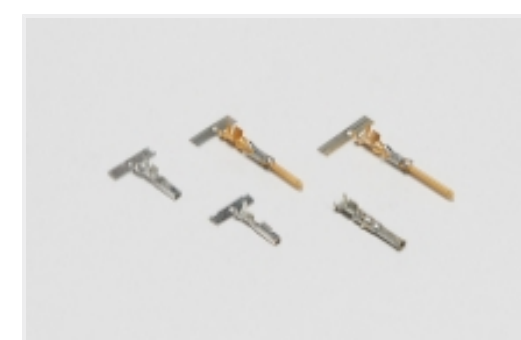

Power Contacts(208)



Rectangular Power Connectors(651)



Standard Circular Connectors(1)


Customers Also Bought



TE Part #2-647123-5
05P MTA156 SHRD HDR ASSY SQ SN



TE Part #1-5747301-6
37 RCPT SP/FMS SCRLK

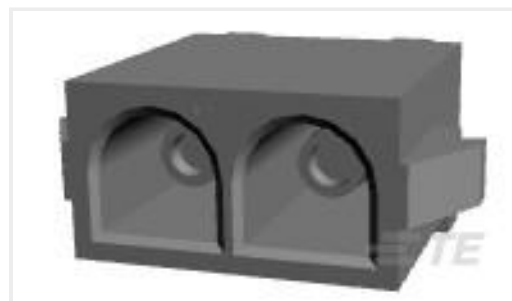

TE Part #350824-4
02P UMNL HDR ASSY PC LF



TE Part #350829-4
12P UMNL HDR ASSY PC 94VO LF




TE Part #825433-6
MOD II SR HDR ASSY 6 POS



TE Part #350826-4
04P UMNL HDR ASSY PC 94VO LF



TE Part #3-1879233-3
SMW5 2R2 5%

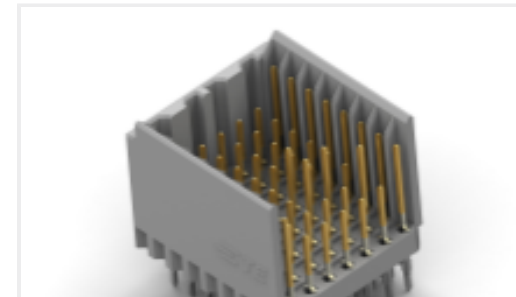

TE Part #2336514-1
2MM HM MALE CONNECTOR, COL 8, M2



TE Part #350830-4
15P UMNL HDR ASSY PC 94VO LF



TE Part #3-641126-6
06P MTA100 HDR ASY FL/STR LF

Documents

Product Drawings

[06P UMNL HDR ASSY PC 94VO LF](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_350827-4_S_c-350827-4-s.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_350827-4_S_c-350827-4-s.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_350827-4_S_c-350827-4-s.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY

English

Product Specifications

Application Specification

English

Agency Approvals

UL

English